

## Main Feature

1. EZ Series Relays are designed for switching capacity by 16A to comply with industrial control system use.
2. Slim type and low profile (29.0 x 12.6 x 15.6) is developed to provide end users with more flexibility in PC Board design.
3. Low power consumption and both AC and DC coil available.
4. Proper insulation distance is equipped to ensure EZ will have a 5000VAC dielectric strength between contact and coil.
5. Complete protective construction from dust and soldering flux is designed. If required, plastic epoxy resin sealed type is available for washing procedure.
6. In accordance with IEC 60335-1 and IEC 60730-1.
7. Halogen Free series is available.

## Contact Rating

Load Type	EZ (DM/DB)	EZ (D)	EZ (AM/AB)	EZ (A)
Rated Load (Resistive)	16A 250 VAC	16A 250 VAC	16A 250 VAC	16A 250 VAC
	20A 120 VAC	20A 120 VAC	20A 120 VAC	20A 120 VAC
	16A 30VDC	16A 30VDC	16A 30VDC	16A 30VDC
Contact capacity	5 FLA /30 LRA 250 VAC	5 FLA /30 LRA 250 VAC	5 FLA /30 LRA 250 VAC	5 FLA /30 LRA 250 VAC
	1/2 HP 250VAC	1/2 HP 250VAC	1/2 HP 250VAC	1/2 HP 250VAC
	Pilot Duty B300/C300	Pilot Duty B300/C300	Pilot Duty B300/C300	Pilot Duty B300/C300
Rated Carrying Current	16A	16A	16A	16A
Max. Allowable Voltage	AC: 250V	AC: 250V	AC: 250V	AC: 250V
	DC: 300V	DC: 300V	DC: 300V	DC: 300V
Max. Allowable Current	16A	16A	16A	16A
Max. Allowable Power Force	4,000VA	4,000VA	4,000VA	4,000VA
	480W	480W	480W	480W
Contact Material	Ag Alloy	Ag Alloy	Ag Alloy	Ag Alloy
Contact Form	SPST	SPDT	SPST	SPDT

Max Allowable Voltage: 300VDC@0.3A

## Application

Cooking Appliance, Audio Equipment, Domestic Appliance and Controlling Equipment...etc.

## Performance (at Initial Value)

- Contact Resistance ..... 100 mΩ Max. @1A,6VDC
- Operate Time ..... 12mSec. Max.
- Release Time ..... 8 mSec. Max.
- Dielectric Strength:
  - Between Coil & Contact ..... 5,000VAC at 50/60 Hz for one minute.
  - Between Contacts ..... 1,000VAC at 50/60 Hz for one minute.
- Surge Strength ..... 10,000V (between coil & contact 1.2x50μSec.)
- Insulation Resistance ..... 100MΩ Min.at 500VDC.
- Max. On/Off Switching:
  - Electrical..... 6 Cycles per Minute.
  - Mechanical ..... 300 Cycles per Minute.
- Temperature Range ..... -40~85 °C.
- Humidity Range..... 45~85% RH.
- Coil Temperature Rise ..... 30 °C Max.

- Vibration:
  - Endurance..... 10 to 55 Hz dual amplitude width 1.5 mm
  - Error Operation ..... 10 to 55 Hz dual amplitude width 1.5mm.
- Shock:
  - Endurance ..... 1,000 m/S<sup>2</sup>.
  - Error Operation..... 100 m/S<sup>2</sup>.
- Life Expectancy:
  - Electrical ..... 10<sup>5</sup> Operations at Rated Resistive Load.
  - Mechanical..... 10<sup>7</sup> Operations at No load condition.
- Weight ..... About 12.5 g.

## Accessories & Sockets

- PI-50BE ..... See Page 175
- PI-50BE/3 ..... See Page 175
- PI-50-0..... See Page 177

## Safety Standard & Its File Number

- UL & C-UL ..... E141060
- TÜV ..... R3-50008955
- VDE ..... 40009648
- CQC.....02001002513

## Coil Specification (at 20 °C)

Coil Sensitivity	Nominal Voltage	Nominal Current (mA)		Coil Resistance ( $\Omega \pm 10\%$ )	Power Consumption (DC:W;AC:VA)		Pull-In Voltage	Drop-Out Voltage	Maximum Allowable Voltage
		50HZ	60HZ		50HZ	60HZ			
EZ DC Coil	6	66.7		90	Abt. 0.40		80% Maximum	5% Minimum	130%
	9	44.6		202					
	12	33.3		360					
	15	26.6		560					
	18	22.3		810					
	24	16.7		1,440					
	48	8.7		5,520					
	60	8.2		7,340					
EZ AC Coil	110	4.1		26,530					
	24	29.75	25.35	350	0.71	0.61		30% Minimum	
	115	7.65	6.3	8,100	0.88	0.73			
230	3.42	2.72	32,500	0.79	0.63				

## Ordering Information

EZ - SS - 1 12 D M - G F

Insulation System:

Nil: Standard Class

F: F Class

Nil: AgNi

G: AgNi Gilded

O: AgNi Plated

N: AgSnO<sub>2</sub>

S: AgSnO<sub>2</sub> Gilded

C: AgCdO

Contact Material

Contact Form:

Nil: One Form C

M: One Form A

B: One Form B

Coil Type:

D: DC Coil

A: AC Coil

Coil Voltage:

VDC (06:6V, 09:9V, 12:12V, 15:15V, 18:18V,

24:24V, 48:48V, 60:60V, 110:110V)

VAC (24: 24V, 115: 115V, 230: 230V)

Number of Pole:

1: One Pole

Type of Sealing:

SS : RT II Flux Proofed Relays

SH : RT III Wash Tight Relays




Type:

EZ


## Classification

Model	EZ					
	DC Coil			AC Coil		
Coil Sensitivity						
Contact Form	1C	1A	1B	1C	1A	1B
Flux Proofed Relay	EZ-SS-1□□□D	EZ-SS-1□□□DM	EZ-SS-1□□□DB	EZ-SS-1□□□A	EZ-SS-1□□□AM	EZ-SS-1□□□AB
Wash Tight Relay	EZ-SH-1□□□D	EZ-SH-1□□□DM	EZ-SH-1□□□DB	EZ-SH-1□□□A	EZ-SH-1□□□AM	EZ-SH-1□□□AB

Dimension ( $\leq 5\text{mm} \pm 0.2\text{mm}$ ,  $> 5\text{mm} \pm 0.3\text{mm}$ , the tolerance of PCB thru hole:  $+0.1\text{mm}$ )

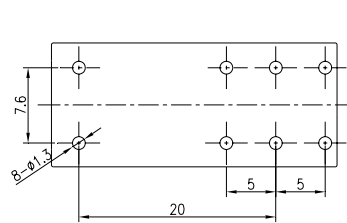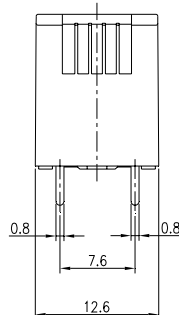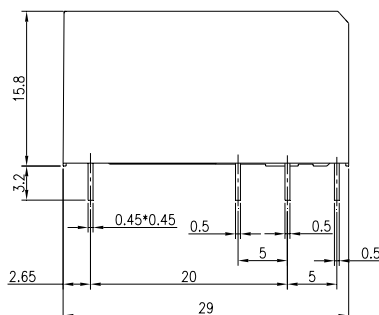


P.C.B. Layout

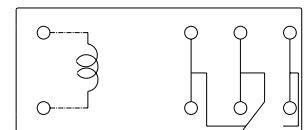


Bottom View

## Reference Data


### Temperature Rise (at 85°C)

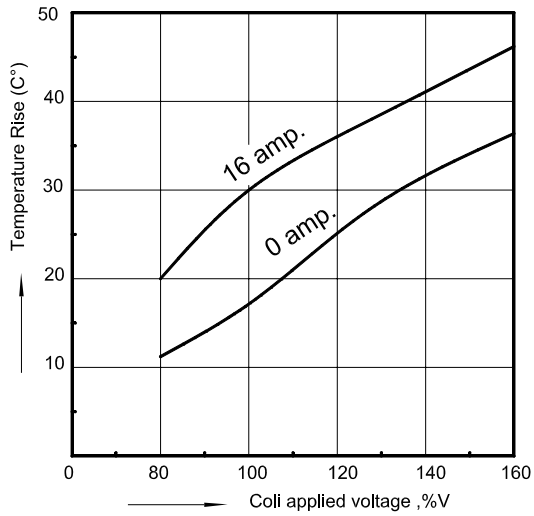

### Endurance

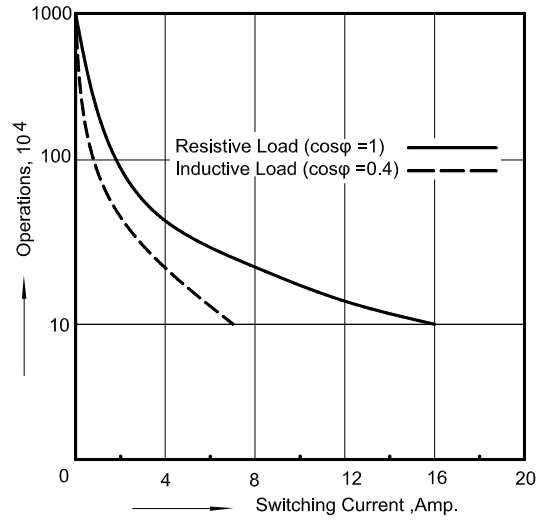

### Operate time

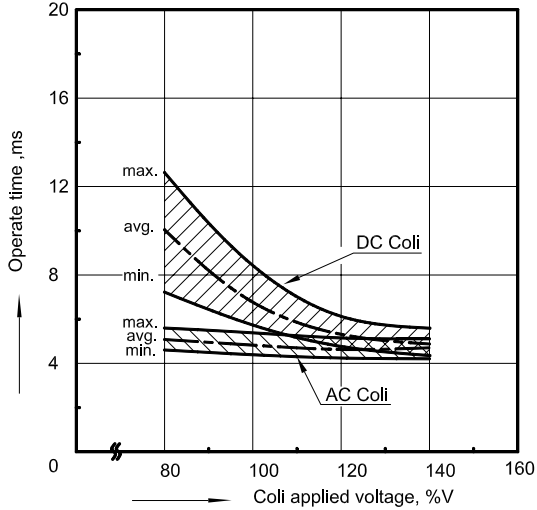

### Release time

