

DIN-RAIL SOCKET ORDERING INFORMATION

◆ PLF DIN-Rail Socket Ordering Information

P	L	F	-	X	24	000	Z	
								Z: RoHS Compliant
								Special code: 000~999
								Coil Voltage: 03:3V, 04:4.5V, 05:5V, 06:6V, 09:9V, 15:15V, 18:18V, 24:24V, 48:48V
								Internal Connections: X: Diode +LED, Positive Pole "+" on A1 Terminal V: Diode +LED, Negative Pole "-" on A1 Terminal A: Diode +LED, no polarity (AC/DC input)
								F: DIN Rail Install with Screw Type Terminals
								Suit Relay Model: L: LR Model or ESR3 series, etc.
								Item: P: Socket

◆ PLF DIN-Rail Socket & Accessories List

No	Socket Name	Suit Relay Model	Note	Image
1	PLF-X□□	LR	□□ for Coil Operation Voltage	Page 139
2	PLF-V□□	LR	□□ for Coil Operation Voltage	Page 139
3	JUMPER	LR SOCKET (PLF, PLS)	20 PINS	Page 139

◆ PI DIN-Rail Socket Ordering Information

P	I	-35	B	E	/3	
						Insulation high: Nil: Standard high /3: Conform to VDE0160
						Safeguard: Nil: Without Finger Protection E: With Finger Protection
						Area Specification: A: Asia Specification B: Europe Specification
						Suit Dimension: -35: 3.5mm -50: 5.0mm
						Suit Relay Model: I: EMI, EZ Model
						Item: P: Socket

◆ PI DIN-Rail Socket List

No	Socket Name	Suit Relay Model	Note	Image
1	PI-35BE	EMI-1P, MI-1P		Page 140
2	PI-35BE/3	EMI-1P, MI-1P	/3: Conform to VDE0160	Page 140
3	PI-50BE	EMI-2P, MI-2P, EZ, EZI		Page 140
4	PI-50BE/3	EMI-2P, MI-2P, EZ, EZI	/3: Conform to VDE0160	Page 141

SIMPLE SOCKET ORDERING INFORMATION:

P	I	-	35	-	0	
						Suit State: Nil: for Socket Terminal Socket 0: for PCB Terminal Socket
						Effective Holes and Suit Dimension: 05: 5 Holes 08: 8 Holes 11: 11 Holes 14: 14 Holes 35: 3.5mm 50: 5.0mm
						Suit Relay Model: Y: RE Model T: RET Model I: EMI, EZ Model L: LR Model
						Item: P: Socket

◆ Simple Socket List



No	Socket Name	Suit Relay Model	Note	Image
7	PI-35-0	EMI-1P, MI-1P	PCB Terminal	Page 141
8	PI-50-0	EMI-2P, MI-2P, EZ, EZI	PCB Terminal	Page 141
9	PL-05-0	LR	PCB Terminal	Page 139

◆ Other Type Socket List

No	Socket Name	Suit Relay Model	Note	Image
1	UC3003	GRL	With Wire Terminals, Side Interlock Type	Page 142
2	CS3770	GRL	With Wire Terminals, Independent Type	Page 142
3	UC3001	GRL	PCB Terminal	Page 142



SOCKET ILLUSTRATION

PLF

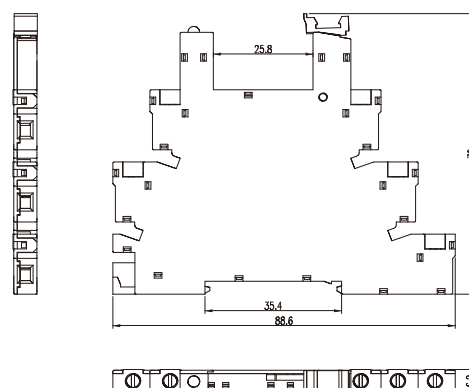
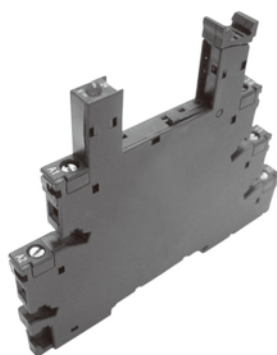


Appearance illustration

JPR

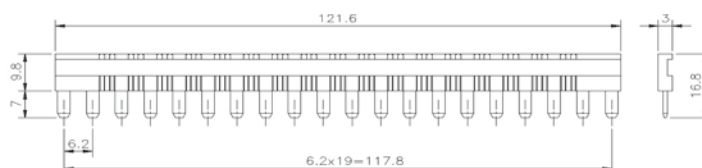
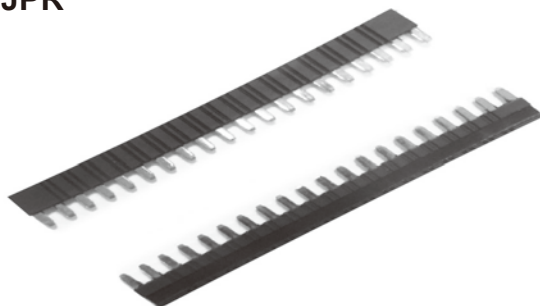


PL-05-0

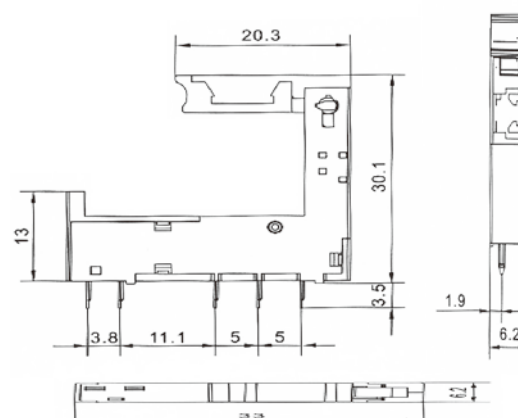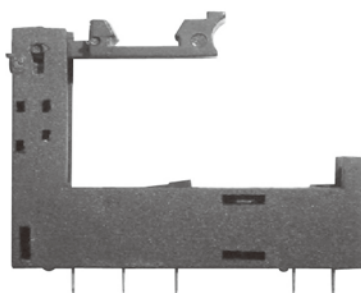

SOCKET ILLUSTRATION



PI-35BE



Terminal illustration





BS-15/20/25-P LM LI-1
Equipment

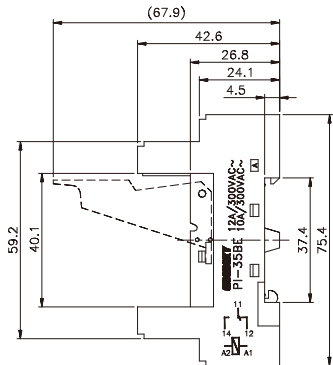

Appearance illustration



PI-35BE/3



Terminal illustration





BS-15/20/25-P LM LI-1
Equipment

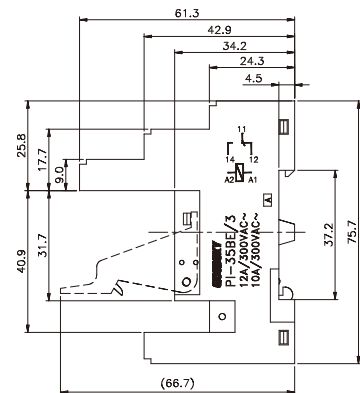

Appearance illustration



PI-50BE



Terminal illustration





BS-15/17/20/25-P LM LI-1
Equipment




Appearance illustration

SOCKET ILLUSTRATION


PI-50BE/3



Terminal illustration

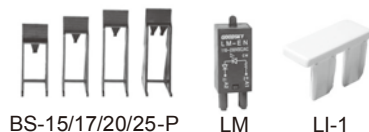


Equipment

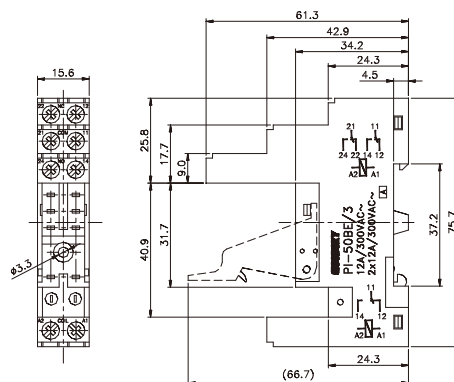

Appearance illustration

PI-35-0

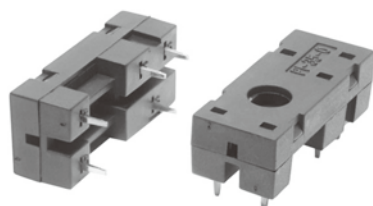

BP-15/20/25-MS
(15/20/25mm)



(Metal)



BP-15/20/25-PS
(15/20/25mm)


(Plastic)

Equipment



Appearance illustration

PI-50-0

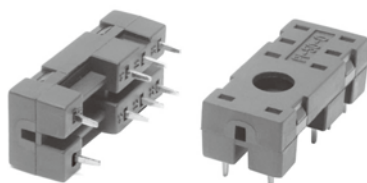

BP-15/20/25-MS
(15/20/25mm)



(Metal)



BP-15/20/25-PS
(15/20/25mm)

(Plastic)


Equipment



Appearance illustration


SOCKET ILLUSTRATION

UC3003

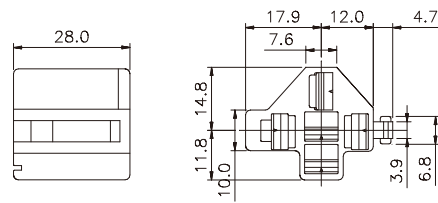



Appearance illustration

CS3770

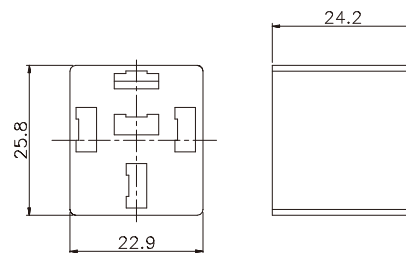

Appearance illustration

UC3001

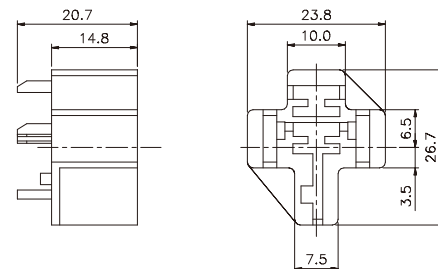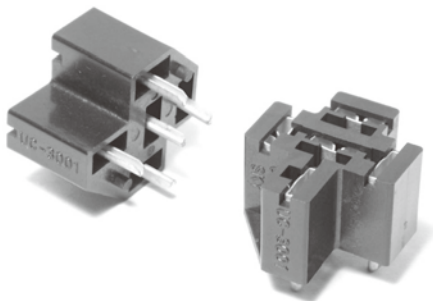

Appearance illustration

RETAINING CLIP FOR SOCKETS ORDERING INFORMATION

B P -15 -P S

Retainer Type:

Nil: For PYF-xxA, PYF-xxBE, PTF-xxA, PF-xxA, PI-xxBE

S: For PF-xxBE, PY, PT, PI-xx-0

Material:

P: Plastic

M: Metal

Suit Relay High:

-15: 15.0~16.5mm

-20: 20.0~20.5mm

-25: 25.0~25.5mm

-29: 29mm (for PYF)

-36: 34.6~35.7mm (for PYF, PTF, PY, PT)

-50: 50mm (for PF)

-60: 69.0~70.0mm (for PPF)

Socket Type:


P: PCB Socket

S: DIN-Rail Socket

Item:

B: Retaining Clip

LED Module

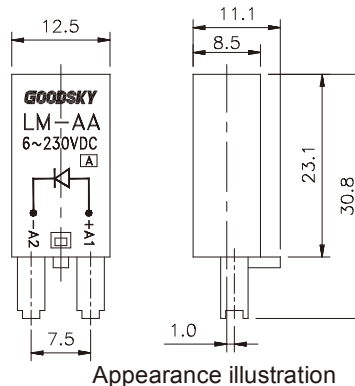

Appearance illustration

LED Module Wiring Diagrams

AC	AB	BC	BD	BE	CF	CG
6/230 V DC -A1 +A2	6/230 V DC +A1 -A2	6/24 V DC -A1 +A2	24/60 V DC -A1 +A2	110/230 V DC -A1 +A2	6/24 V DC +A1 -A2	24/60 V DC +A1 -A2
CH	DI	DJ	DK	EL	EM	EN
110/230 V AC +A1 -A2	6/24 V AC +A1 -A2	24/60 V AC +A1 -A2	110/240 V AC +A1 -A2	6/24 V AC/DC +A1 -A2	24/60 V AC/DC +A1 -A2	110/230 V AC/DC +A1 -A2
FO	FP	FQ	FR	GR	GS	GT
6/24 V AC/DC +A1 -A2	24/60 V AC/DC +A1 -A2	110/230 V AC/DC +A1 -A2	12/48 V AC/DC +A1 -A2	24 V AC +A1 -A2	115 V AC +A1 -A2	230 V AC +A1 -A2
HU	JV	JW	JX			
110/230 V AC +A1 -A2	6/24 V AC/DC +A1 -A2	24/60 V AC/DC +A1 -A2	110/230 V AC/DC +A1 -A2			

LED MODULE ORDERING INFORMATION

LM - AC - G

LED Color:

Nil: Red

G: Green

Area Code:

AC, AB

BC, BD, BE

CF, CG, CH

DI, DJ, DK

EL, EM, EN

FO, FP, FQ, FR

GR, GS, GT

HU

JV, JW, JX

Item:

LM: LED Module

IDENTIFICATION BOARD

L E -1

Type:

1: Standard Type

Suit Socket Model:

E: PYF-BE Model

I: PI-BE Model

Item:

L: Identification Board

V.01BX